

Resene colour charts are updated regularly. This colour chart file is part of the colour chart archive, which we provide so you can view Resene colours that have been available over the years. Most older colours can still be tinted – check with your Resene ColorShop team if you need an older colour for your project.

To view the latest Resene colour charts, visit www.resene.com/colour-charts



FLECKLE

**CONTINUOUS
PLASTIC**

**WALL
COATING**

FOR PROTECTION



FOR DECORATION




Colour Chart

FLECKLE

CONTINUOUS PLASTIC WALL COATING

F 10 1-016

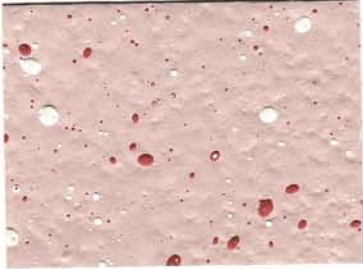


MUSHROOM
SPOT: MEXICAN RED & WHITE

F 11 5-061




FOREST GREEN
SPOT: SHADOW GREEN & WHITE

F 12

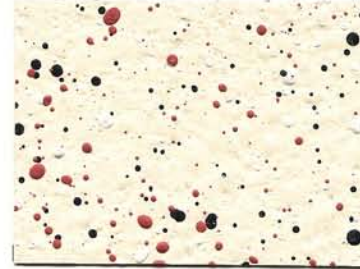


IVORY
SPOT: BLACK, WHITE & MEX. RED

F.13 4-053

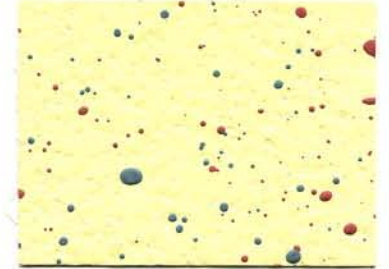


PRIMROSE
SPOT: MEXICAN RED & SHADOW GREEN

F 14 3-037

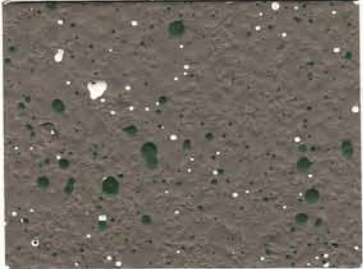


COFFEE
SPOT: FOREST GREEN & WHITE

F 15

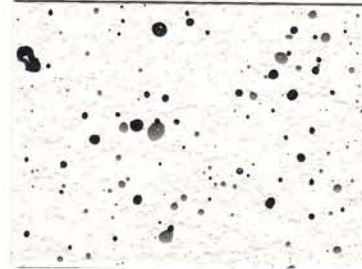


WHITE
SPOT: COFFEE & BLACK

F 16 5-059

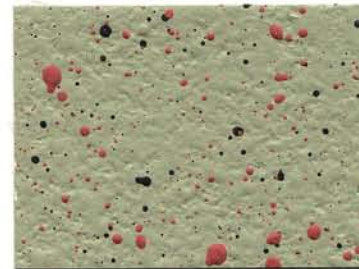


SAGE
SPOT: BLACK & MEXICAN RED

F 17 7-082

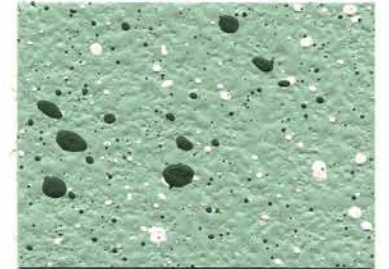


SHADOW GREEN
SPOT: WHITE & FOREST GREEN

F 18

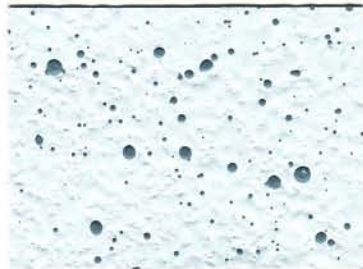


CHINA BLUE
SPOT: MYSTIC BLUE

F 19

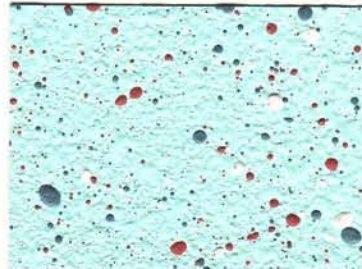

WREN BLUE
SPOT: MEXICAN RED & MYSTIC BLUE

F 20

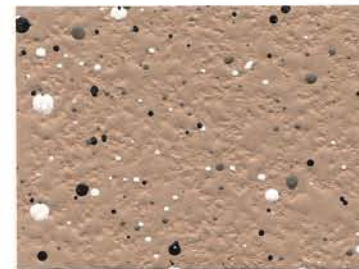

TEAK
SPOT: BLACK, WHITE & COFFEE

F 21 9-094



MIST GREY
SPOT: BLACK & WHITE

F 22




MYSTIC BLUE
SPOT: WHITE

F 23




CORAL
SPOT: COFFEE

F 24 1-025

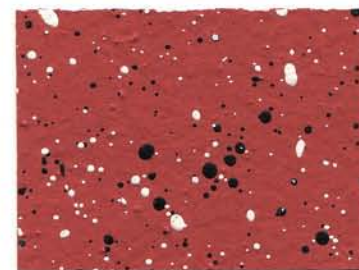

MEXICAN RED
SPOT: BLACK & WHITE

F 25 9-096

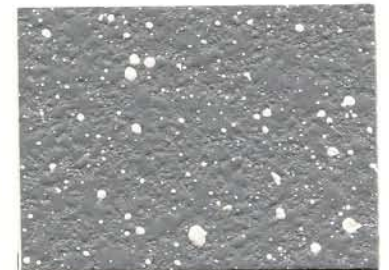

SHALE
SPOT: WHITE



Fleckle

SPECIALIZED WALL COATING

FLECKLE is a highly specialized formulation suitable only for spray application. It is a heavy viscous material which gives an attractive continuous finish when applied by conventional or airless spray equipment. This base coat may be five to six times the thickness of an ordinary paint film.

FLECKLE is recommended for interior or exterior surfaces (except unprimed ferrous metal, aluminium and exterior woodwork) to provide a durable, washable, stain-resistant, decorative finish which inhibits the growth of fungi and bacteria.

Building materials which have been satisfactorily Fleckled include asbestos, cement, concrete, cement render (off the wood or steel float), concrete blocks, Pinex (softboard and hardboard), Gibraltar board and fibrous plaster.

The base coat is available in the standard colours shown and also in B.S.S. colours on request.

The final outstanding decorative effect is obtained by spraying flecks or spots or coloured Fleckle on to the base coat by means of a spotting gun. This pleasing Fleckled finish may be varied at will by using any combination of Fleckle colours. Coverage of the base coat is approximately 80 square feet per gallon.

When applying Fleckle the temperature should not be below about 50°F.

STIPPLECOTE PRODUCTS LTD.

GOUGH STREET, SEAVIEW
LOWER HUTT

P.O. BOX 36-006
MOERA, LOWER HUTT