

Resene colour charts are updated regularly. This colour chart file is part of the colour chart archive, which we provide so you can view Resene colours that have been available over the years. Most older colours can still be tinted – check with your Resene ColorShop team if you need an older colour for your project.

To view the latest Resene colour charts, visit www.resene.com/colour-charts

Resene Hi-Glo

Acrylic roof paint



the Paint the Professionals use

Resene Hi-Glo Acrylic roof paint



BLUE SLATE




RUSTIC RED



FERN



COCOA BROWN

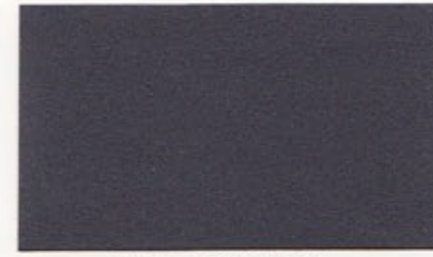

* BRIGHT CHARCOAL



* METALLIC COPPER



BLUE TURQUOISE



HOT CHILE




CHALET GREEN



MOROCCO BROWN



* SILVER BLUE

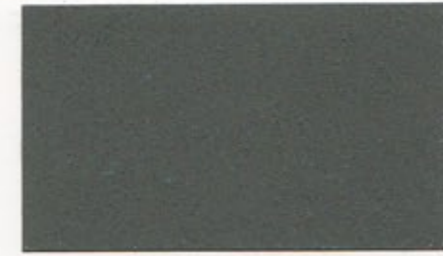

* METALLIC GREEN



STEEL GREY




RED OXIDE



GABLE GREEN



INDIAN TAN

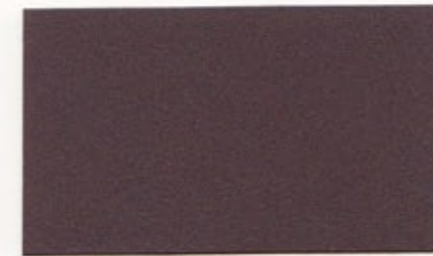

* SILVER BROWN



AMBER TAN



MID GREY



EBONY



THATCH GREEN



SHINGLE FAWN



* BRIGHT GREY



ORANGE FIRE

ALSO AVAILABLE IN WHITE

the Paint the Professionals use

* CONTAINS MICACEOUS IRON OXIDE

Resene Hi-Glo Acrylic roof paint

the Paint the Professionals use

Hi-Glo roof paint is formulated on a 100% acrylic emulsion for ease of application and maximum life.

Fashion colours

Hi-Glo is available in 24 of the latest light-fast fashion shades.

Quick drying

Resene Hi-Glo dries in 20 minutes and can be recoated in one to two hours.

Application. New Iron: Hi-Glo can be applied to new iron provided it is completely free from white corrosion. Wash surface down thoroughly with water and detergent. Rinse off with clean water.

Application. New iron where there are signs of corrosion: Wash down thoroughly with water and detergent. Rinse off with clean water. Apply one coat of Resene Galvo-One (non-toxic) primer. Allow 24 hours to dry and apply two coats Resene Hi-Glo. Allow 4 hours between coats.

Application:

Repaint and old iron: Clean down all loose and flaking paint by wire brushing and prime all rusty areas with one coat of Resene Galvo-One (non-toxic) primer. Apply two coats Resene Hi-Glo as above.

Asbestos, Tiles, Concrete: Pre-treat surface with Resene Moss & Mould Killer and leave for 2 weeks. Brush down thoroughly and apply 2 coats Resene Hi-Glo roof paint.

Clean up: Wash brushes and equipment in water.

Spreading Rate: Hi-Glo roof paint should be applied at 12 to 14 sq. metres per litre. Do not apply at temperatures below 50°F (10°C) and avoid painting in hot sunny conditions, work on shady side.

Non Toxic. Roofs painted with Hi-Glo roof paint may be used for the collection of drinking water. It is recommended that the downpipes are disconnected for the first shower of rain and later reconnected.

Ask to see the Resene British Standard Specification 101 and 88 colour ranges



Resene Paints Limited

GOUGH STREET, LOWER HUTT, P.O. BOX 36-006. PHONE 684-319. TELEGRAMS 'RESENE'
BRANCHES: AUCKLAND, CHRISTCHURCH, DUNEDIN, HAMILTON, NAPIER, HASTINGS, NELSON, ROTORUA