


Resene colour charts are updated regularly. This colour chart file is part of the colour chart archive, which we provide so you can view Resene colours that have been available over the years. Most older colours can still be tinted – check with your Resene ColorShop team if you need an older colour for your project.

To view the latest Resene colour charts, visit [www.resene.com/colour-charts](http://www.resene.com/colour-charts)

# Resene Hi-Glo acrylic roof paint

The Paint the Professionals use

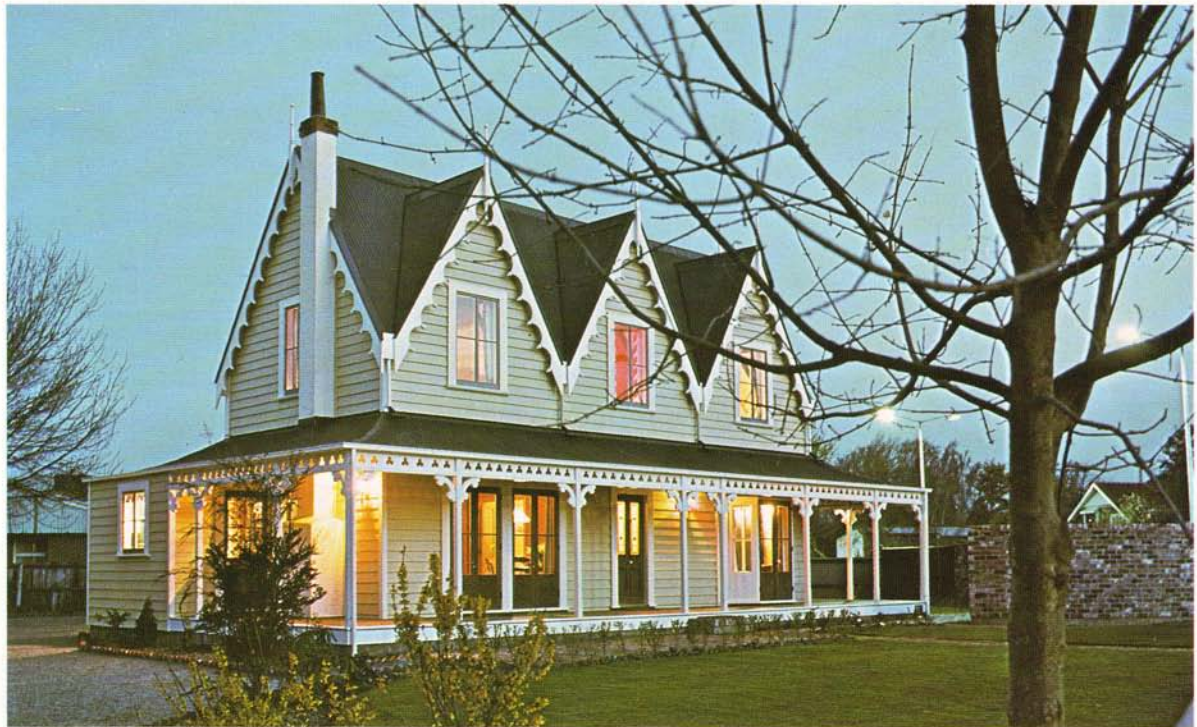

# Resene Hi-Glo acrylic roof paint



BLUE SLATE



RUSTIC RED



FERN



COCOA BROWN



\* BRIGHT CHARCOAL



\* METALLIC COPPER



BLUE TURQUOISE



HOT CHILE



CHALET GREEN



MOROCCO BROWN



\* SILVER BLUE



\* METALLIC GREEN



STEEL GREY



RED OXIDE



GABLE GREEN



INDIAN TAN



\* SILVER BROWN



AMBER TAN



MID GREY



EBONY



THATCH GREEN



SHINGLE FAWN



\* BRIGHT GREY



ORANGE FIRE

ALSO AVAILABLE IN WHITE

**The Paint the Professionals use**

\* CONTAINS MICACEOUS IRON OXIDE

# Resene Hi-Glo acrylic roof paint

## The Paint the Professionals use

Hi-Glo acrylic roof paint is formulated on a 100% acrylic emulsion for ease of application and maximum life.

### Fashion Colours

Available in 24 modern light fast fashion shades including six micaceous Iron Oxide colours for the today look.

Hi-Glo roof colours are also available in the BSS 2660 range — 101 colours, BSS 4800 range — 88 colours, BSS 5200 range — 235 colours.

### Non-toxic

Hi-Glo roof paint is non-toxic and therefore roofs painted with Hi-Glo may be used for the collection of drinking water.

It is recommended that the downpipes are disconnected for the first shower of rain and later reconnected.

### Surfaces

Primed galvanised iron — asbestos — concrete roofing tiles

### Spreading rate

Apply at 12 to 14 square metres per litre. Do not apply at temperatures below 10°C and avoid painting in hot sunny conditions (work on the shady side).

### Application — New Iron

Ensure surface is clean and free from oil, grease, dirt and salt contamination. If any signs of the above, wash thoroughly with detergent and clean water.

1. Apply One Coat Resene Galvo-One galvanised iron primer (see pamphlet). Allow 24 hours before overcoating.
2. Apply two coats Resene Hi-Glo roof paint allowing 4 hours between coats.

### Application — Old Iron and Repaints

Ensure surface is clean and free from contaminants as above. Remove all loosely adhering paintwork by wire brushing or preferably by water blasting.

1. Prime all bare areas with Resene Galvo-One (areas showing brown rust formation should be double primed).
2. Apply Two Coats Resene Hi-Glo roof paint allowing 4 hours between coats.

On tile and asbestos roofing, waterblast clean and treat with Resene Moss and Mould Killer before painting (see pamphlet).

### Clean Up

Brushes and equipment wash out in water.

Ask to see the Resene British Standard Specification 101 and 88 colour ranges



## Resene Paints Limited

GOUGH STREET, LOWER HUTT. P.O. BOX 36-006. PHONE 684-319. TELEGRAMS "RESENE".  
BRANCHES: AUCKLAND, HAMILTON, HASTINGS, NAPIER, CHRISTCHURCH, DUNEDIN.