

Resene colour charts are updated regularly. This colour chart file is part of the colour chart archive, which we provide so you can view Resene colours that have been available over the years. Most older colours can still be tinted – check with your Resene ColorShop team if you need an older colour for your project.


To view the latest Resene colour charts, visit www.resene.com/colour-charts

Resene Sidewalk Polyurethane paving paint


INTERIOR/EXTERIOR



The Paint the Professionals use

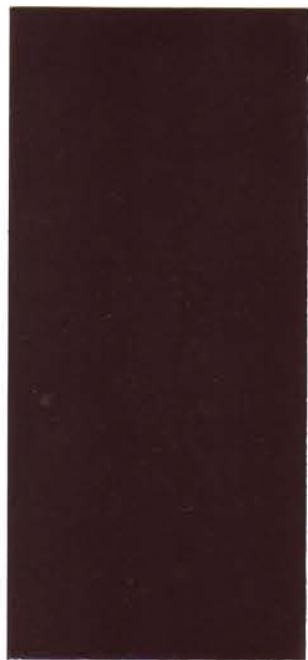

BARCELONA

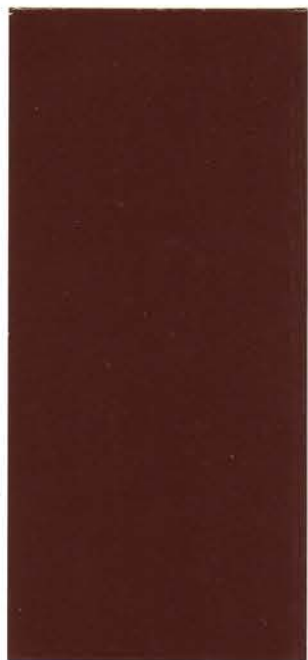

DARK GINGER



STONE



CLAY



DARK BEIGE



MUSK



TERRACOTA



PATIO RED

Resene Sidewalk Polyurethane paving paint

INTERIOR/EXTERIOR

Use Sidewalk inside and outside on paths — steps — decking — garage floors — light industrial floors — timber — concrete — fibre reinforced cement.

Sidewalk dries to an even semi gloss finish with superior non-slip features.

Sidewalk is based on a tough flexible Polyurethane resin to give maximum durability and abrasion resistance in a one pack finish.

Available in 16 fashion colours.

SLATE



VERANDAH GREY



PEBBLE GREY



BISCUIT



VOYAGER



CLIPPER BLUE



OLIVE TREE



TILE GREEN



Resene Sidewalk Polyurethane paving paint

INTERIOR/EXTERIOR

Sidewalk, an Interior/Exterior general purpose quick drying Paving Paint. Sidewalk is based on a tough flexible polyurethane resin to give maximum durability and abrasion resistance in a one pack finish. Sidewalk dries to an even semi gloss finish with superior non-slip features. Sidewalk is suitable for use on the following areas. Paths — Steps — Decking — Garage floors — Light industrial floors — Timber — Concrete — Fibre reinforced cement.

Surface Preparation

It is imperative that all surfaces are clean, dry and free from dirt,

dust, oil and grease, and any signs of mould and efflorescence. Old paintwork should be sanded to produce a dull finish.

Exposed old unpainted timber should be thoroughly sanded to remove all loose cellulose fibres, and primed with Resene Wood Primer.

Concrete and fibre reinforced cement should be treated to remove all loose material and fibre. Ensure the concrete surface is firm and free of efflorescence

— **best results are by waterblasting.**

Polished and glossy concrete should be acid etched or sand-blasted. Alternatively clean glossy

concrete can be primed with Resene Smooth Surface Sealer, see Data Sheet No. D47 (Concrete surfaces must be well cured and at least 6 weeks old).

Application

Apply by brush, roller or spray and allow 8-12 hours between coats. Best results are achieved with 2 or 3 coats. For full specifications on application, see Data Sheet No. D38.

Coverage

12.5 square metres per litre.

Cleaning up and Thinning

Use Mineral Turps.



Resene Paints Limited

GOUGH STREET, LOWER HUTT, P.O. BOX 36-006. PHONE (04) 684-319
RESENE COLOR SHOPS THROUGHOUT NEW ZEALAND.