

Resene colour charts are updated regularly. This colour chart file is part of the colour chart archive, which we provide so you can view Resene colours that have been available over the years. Most older colours can still be tinted – check with your Resene ColorShop team if you need an older colour for your project.

To view the latest Resene colour charts, visit www.resene.com/colour-charts

Resene timber stain

exterior natural wood finish



The timber stain the Professionals use



Dark Mahogany

Blue

Punga

Bamboo

Bleached Cedar

Fir Green

Nutmeg

Cedar

Cherry Wood

also in Clear


Resene timber stain

exterior natural wood finish

Resene Timber Stain is the natural colourful way of treating and protecting exterior woodwork and enhancing the natural grain.

Resene Timber Stain can be applied directly to most dressed or rough sawn timbers and brings a new colourful dimension to weather boards, fences, garden furniture, beams etc.

Resene Timber Stain is based on pure linseed oil to ensure deep penetration and a lasting natural finish.
Colours can be intermixed to give a much wider range.

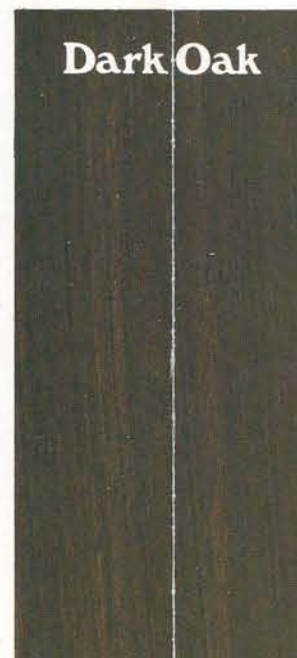

Ash Brown

Poplar

Redwood

Grey Green

Dark Oak

English Walnut

Burmese Teak

Light Oak

Black

Resene Timber Stain is not a paint and when applied to timber it allows the natural grain to show through. Colour may vary on some timbers. Resene Timber Stain has been developed from a formulation prepared by the American Forest Products Laboratory for the treatment of Redwood, Cedar and Oregon timbers. It contains water repellent chemicals, three waterproofing materials along with carefully selected mould inhibitors. All these are suspended in a linseed oil base and pigmented with oxides offering high colour retention.

In most climatic conditions Resene Timber Stain maintains its colour and protective properties for 3 to 5 years. However,



in areas where maximum exposure to the sun causes the timber to dry out rapidly, more frequent coatings may be required.

Directions:

Resene Timber Stain may be applied to almost all timbers available in New Zealand. Ensure all timber is dry before application.

Apply one coat of Resene Timber Stain by brush ensuring that it is pushed well into the surface.

Putty all nail holes with linseed oil putty matched to the selected colour.

Pay particular attention to joints and end grains. On particularly hard close grained timbers, because of their more impervious nature, the Stain may need to be wiped with a rough cloth after 12 hours to leave an even finish.

A second coat should be applied after three to four weeks. Where Resene Timber Stain is used on weatherboard, the first coat should be applied before it is erected.

Wash brushes in mineral turps. Resene Timber Stain covers approximately 8 to 10 square metres per litre on rough, sawn timber 14 — 16 square metres per litre on dressed timber.

Resene timber stain

exterior natural wood finish



MANUFACTURED BY STIPPLECOTE PRODUCTS LIMITED, GOUGH ST. LOWER HUTT, WELLINGTON
WELLINGTON AUCKLAND HAMILTON CHRISTCHURCH DUNEDIN