

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

LL5410001 10-24

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes serious eye irritation. Causes mild skin irritation. Suspected of damaging fertility or the unborn child. May cause damage to organs. Very toxic to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE MISTS, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water. If skin irritation occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

If exposed or concerned, seek medical advice. When seeking medical advice take this container with you. Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

CONTAINS: Xylene 20-280 g/L.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet RA23.

SPILLS: Use appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner. See resene.com/cleanup for cleaning instructions.

IN CASE OF FIRE: Use foam, CO₂, dry chemical for extinction.

WARNING

KEEP OUT OF REACH OF CHILDREN

Resene

ArmourX Cold Galv zinc rich primer



GREY

Resene ArmourX Cold Galv is a single pack high zinc content primer exhibiting the excellent corrosion resistance of zinc rich primers.

Preparation

• For rusted areas, scrub down using Resene Roof and Metal Wash (see Data Sheet D88). **Do not allow the wash solution to dry out on the surface** (this includes window glass and joinery). Rinse clean or hose down with copious amounts of water ensuring all wash solution is removed.

• Remove all areas of white corrosion material, all paint that is flaking or unsound and as much red rust as is practicable using mechanical methods, such as a 3M Rust and Paint Removal Disc, to leave only tightly adherent corrosion products. Take care not to damage the substrate or the surrounding areas. Where under-film corrosion is present, remove existing paint using a 3M Rust and Paint Removal Disc or equivalent to remove corrosion products. Take care not to damage sound coated areas. Feather all paint edges to a smooth finish. Inadequate surface preparation will have an adverse effect on the final paint system.

Mixing and application

• Thinning requirements may vary according to the application method, equipment and environmental conditions. Using the wrong thinner will have an adverse effect on application and performance.

• If thinning is required add the recommended thinner after the components have been blended and thoroughly re-mix using the power mixer.

• Ensure the correct wet film thickness is applied to achieve the desired dry film thickness. Allow for any thinner added.

• Drying is affected by low temperatures and high humidity.

• The temperature of the substrate should be 3°C above the "Dew Point".

• The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.


• Following appropriate preparation, all surfaces must be dry and clean prior to painting.

• This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or

not referred to, contact your local Resene ColorShop or reseller for your nearest Resene Technical Representative.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

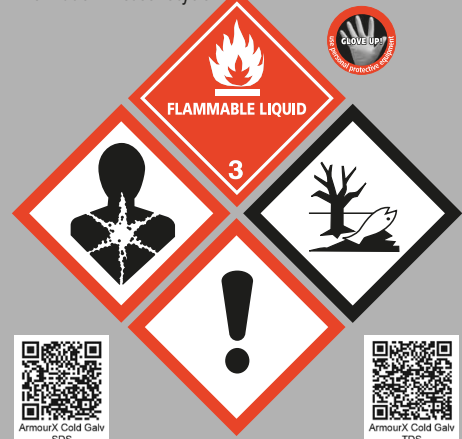

UN NO. 1263 – PAINT RELATED MATERIAL

Resene
the paint the professionals use

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, Qld 4214
Ph 1800 738 383 Visit resene.com.au
In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre,
Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Resene
Automotive & Light Industrial

Resene Automotive & Light Industrial
PO Box 62282, Sylvia Park, Auckland 1644
Ph (09) 259 2738
Visit reseneauto.co.nz

Quick check

Use on: Steel, plates, tanks, pipelines and galvanising repairs.

Generic type: Single pack organic zinc rich primer.

Finish: Matt.

Typical coverage: 6.3 square metres per litre at 75 microns D.F.T.

Recommended dry film thickness (D.F.T.): 75 microns per coat.

Dry time (minimum): Touch dry: 20 minutes at 20°C. Hard dry: 4 hours at 20°C. Drying is affected by low temperatures and high humidity.

Recoat time (minimum): Minimum: 4 hours at 20°C. May be overcoated with acrylics, alkyds, chlorinated rubber systems and vinyls (see limitations).

Usual number of coats: 1 (spray application) at 6.3 sq. metres per litre. 2 (brush application) at 12.6 sq. metres per litre.

Application method: Conventional spray. Apply by brush to small areas only.

Thinning and clean up: Resene Thinner No.6 (spray application), Resene Thinner No.11 (brush application).

Colour: Grey.

Limitations: Do not overcoat with two component (2K) priming or finishing systems. Apply a non-saponifiable barrier coat, such as Resene Galvo-One (see Data Sheet D41), when overcoating with alkyd or oil-based systems. Apply Resene Galvo-One or Resene Galvo-Prime (see Data Sheet D402) before applying acrylic topcoats. **Before use:** Stir with a wide, flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy. Read the appropriate Product Data Sheet and Safety Data Sheet before use.

FLAMMABLE LIQUID AND VAPOUR
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Please ensure that use of this product is compatible with the substrate and surface preparation method. Resene does not accept any responsibility for the application of incorrect product to substrate. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.