

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.  
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

**SAFETY PRECAUTIONS**

Read label before use. Keep out of reach of children. Harmful in contact with skin. Harmful if inhaled. Harmful if swallowed. Causes skin irritation. Causes serious eye irritation. May cause an allergic skin reaction. Harmful to aquatic life with long lasting effects.

**PRECAUTIONS**

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Use in a well-ventilated area. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment.

**FIRST AID**

IF SWALLOWED: Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of water. If skin irritation or rash occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

When seeking medical advice take this container with you.

Further information can be obtained from  
AUST: POISONS INFORMATION CENTRE 131 126  
or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)  
or call Resene 0800 737 363.

CONTAINS: Gum Turpentine 170-360 g/L.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet D507.

**SPILLS:** Use appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps. See [resene.com/cleanup](http://resene.com/cleanup) for cleaning instructions.

**FIRE:** Use foam, carbon dioxide or dry chemical powder.

**WARNING**

KEEP OUT OF REACH OF CHILDREN

# Resene

## Danska Teak Oil

### natural wood finish

interior



CLEAR

Resene Danska Teak Oil is a highly 'refined' linseed oil product designed to enhance the beauty and grain of heart timbers such as Rimu and Teak. It produces the most natural results when left uncoated.

**Preparation**

- Ensure the surface is in sound condition, thoroughly sanded, dry and free from dirt, dust and loose material.
- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).
- Thoroughly sand bare timber before coating. Finish off with fine sandpaper remembering always to sand with the grain.
- **All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.**
- This product may be used on a wide variety of surfaces. If the surface you propose to coat is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

**Application**

- Apply liberally by brush or lint-free cloth. Allow to penetrate into the surface.
- Avoid skin contact. Wear gloves when applying by rag or when wiping off any surplus.
- Wipe excess Resene Danska Teak Oil off with a dry, absorbent lint-free cloth, rubbing along the grain.
- Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat the coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

**Overcoating**

- Leave Resene Danska Teak Oil natural or overcoat if preferred with solventborne Resene Qristal polyurethane.
- Ensure Resene Danska Teak Oil is thoroughly dry before overcoating with solventborne Resene Qristal polyurethane.


**Precautions**

**Thoroughly rinse cloths with detergent and water before discarding. Dispose of impregnated cloths very carefully as discarded cloths can generate heat and catch fire.**

**Be PaintWise**

For tips on responsible disposal of paint, cleaning equipment and

minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or [paintback.com.au](http://paintback.com.au) (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

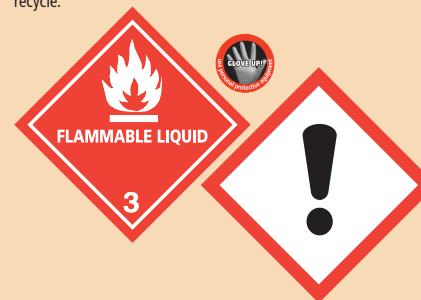

UN NO. 1263 –  
PAINT RELATED PRODUCT

**FLAMMABLE LIQUID AND VAPOURS**

Keep away from heat, hot surfaces, sparks,  
open flames and other ignition sources.

Danska Teak Oil  
SDS**Resene**

the paint the professionals use

Danska Teak Oil  
TDS

In Australia: Resene Paints (Aust) Ltd  
7 Production Ave, PO Box 918, Ashmore City, Qld 4214  
Ph 1800 738 383 Visit [resene.com.au](http://resene.com.au)

In New Zealand: Resene Paints Ltd  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [resene.com.nz](http://resene.com.nz)

**Quick check**

**Use on:** Interior timber surfaces. Do not use on floors that are to be polyurethaned.

**Gloss level:** Low sheen.

**Coverage:** Up to 30 square metres per litre per coat.

**Dry time (minimum):** 24 hours at 20°C dependent on the surface. Drying is slowed by low temperatures and high humidity and is dependent on timber type and varnish.

**Recoat time (minimum):** 48 hours at 20°C.

**Primer required:** No.

**Usual number of coats:** One.

**Application method:** Brush or clean lint-free cloth.

**Thinning:** Do not thin.

**Clean up:** Mineral turps.

**Thoroughly rinse cloths with detergent and water before discarding. Dispose of impregnated cloths very carefully as discarded cloths can generate heat and catch fire.**

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

Read the appropriate product Data Sheet and Safety Data Sheet before use.

Please ensure that use of this product is compatible with the substrate and surface preparation method. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.