

net contents
10 litres

LL8560110 9/15

WARNING

Read label before use. Keep out of reach of children. Causes mild skin irritation. Causes eye irritation. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

AVOID BREATHING DUST, FUMES, GAS, MISTS, VAPOURS, SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Wash all exposed external body areas thoroughly after handling. Avoid release to the environment. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint.

FIRST AID

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE or doctor/physician if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs, seek medical attention. Wash contaminated clothing before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists: Get medical attention or advice.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Ammonia Anhydrous Liquefied 1-20 gms/L, Propylene Glycol Monobutyl Ether - Alpha Isomer 20-80 gms/L, Alcohols C11-15 secondary Ethyoxyated 1-20 gms/L.

For use by set designers.

For full technical instructions see Data Sheet D905.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.


WARNING

KEEP OUT OF REACH OF CHILDREN

FilmPro

professional set paint

waterborne exterior/interior

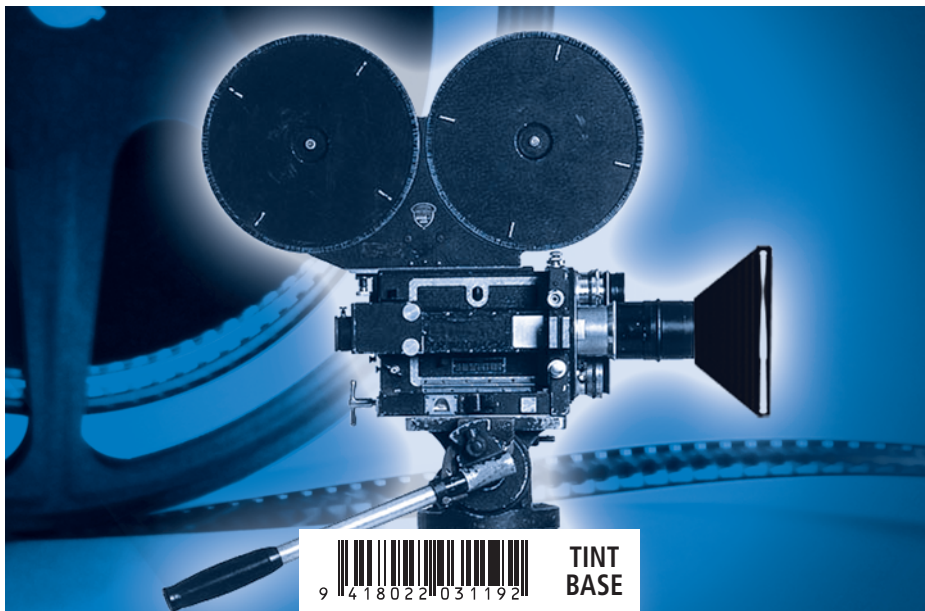

TINT
BASE

Resene FilmPro is a tough waterborne finish designed to colour and enhance sets.

Application

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- **Coverage:** 12 square metres per litre per coat. Coverage will vary dependent on surface porosity and profile. Use two coats of Resene Howzat as an undercoat under Resene Digital Green.
- **Dry time (minimum):** 30 minutes at 18°C. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period.
- **Recoat time (minimum):** 2 hours. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.
- **Usual number of coats:** 1-3 depending on finish or effect required.
- Stir with a wide flat stirrer prior to application. Do not shake or brush excessively.
- **Application method:** Synthetic fibre roller, brush, speed brush or spray. First coat may be thinned 10% with water. Subsequent coats should be applied undiluted.
- **Thinning and clean up:** Water.



Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.



FilmPro SDS

Resene

the paint the professionals use



FilmPro TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Phone 1800 738 383 Fax 1800 064 960
Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
Phone (04) 577 0500 Fax (04) 577 0600
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAJ, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.