

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

LL3930001 10-24

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Harmful if swallowed. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Use only in a well-ventilated area. Obtain special instructions before use. Wear protective gloves and clothing, eye and face protection. Wash all exposed external body areas thoroughly after use. Contaminated work clothing should not be allowed out of the workplace. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of water. If skin irritation or rash occurs get medical advice or attention. Take off immediately all contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

Call a POISON CENTRE, doctor or first aider if you feel unwell.

If exposed or concerned, get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Solvent Naphtha Petroleum, heavy aromatic <130 g/L.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D413.

SPILLS: Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps. See resene.com/cleanup for cleaning instructions.

FIRE: Use foam, carbon dioxide or dry chemical powder.


WARNING

KEEP OUT OF REACH OF CHILDREN

Resene

Pre-Coated Steel Primer

solventborne exterior for cladding and roofing

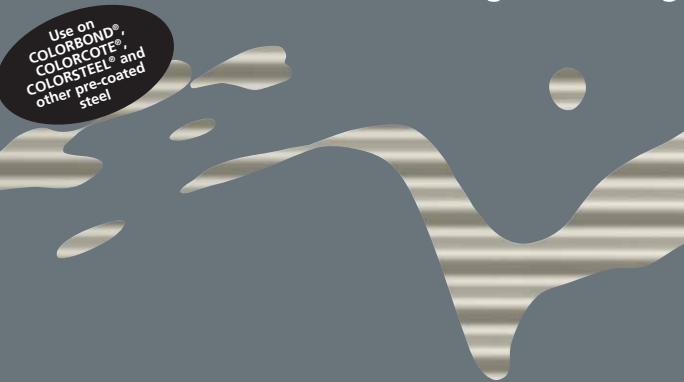

Use on
COLORBOND®,
COLORSTEEL®,
and
other pre-coated
steel



Resene Pre-Coated Steel Primer is a single pack adhesion primer for application to new factory coated roofing and cladding to ready it for topcoating with Resene waterborne paints. It can also be used as an anti-corrosive primer for new or weathered Zinalume and galvanising where a solventborne cool primer is required to maximise heat reflection when topcoating with Resene CoolColours. Use on exterior horizontal and vertical applications, including roofs, walls and fences.

Preparation

• Ensure the surface is in sound condition, dry and free from dirt, dust, loose material and salt. Remove accumulated windblown salt by washing with Resene Heavy Duty Paint Prep & Oil Remover (see Data Sheet D816).

• Water blasting is the best surface preparation prior to repainting of weathered galvanised steel and Zinalume.

• If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).

• If the roof is used for the collection of drinking water disconnect downpipes until the total paint system has been applied and has received its first heavy shower of rain. Divert run-off water to a grassed area for the first two to three showers.

• All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.

• Consult your Resene ColorShop or reseller for technical advice on painting of badly rusted roofs.

• This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or reseller.

Application

• Resene Pre-Coated Steel Primer is best applied by brush to ensure full surface wetting of substrate is achieved.

• Do not allow galvanised steel or Zinalume to weather. Apply Resene Pre-Coated Steel Primer as soon as practical after erection.

Overcoating

• For new work apply one full coat of Resene Pre-Coated Steel Primer and allow 12 hours before recoating.

• For severe coastal environment apply a second coat of Resene Pre-Coated Steel Primer.
• Resene Pre-Coated Steel Primer has been developed for use under most waterborne roof and exterior paints.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



UN NO. 1263 – PAINT RELATED PRODUCT



Resene

the paint the professionals use



In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Use on: Factory coated steel cladding/roofing.

Gloss level: Low gloss.

Typical coverage: 12 square metres per litre per coat. Coverage may vary depending on substrate, colour, application technique and weather/temperature conditions. See the Resene website for more information.

Dry time (minimum): 5 hours at 20°C. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Recoat time (minimum): 12 hours at 20°C.

Usual number of coats: Usually one.

Application method: Brush, roller or airless spray.

Thinning and clean up: Resene Thinner No.2 or mineral turps.

Colour range: Off white.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy. Read the appropriate Product Data Sheet and Safety Data Sheet before use.

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 737 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.