

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.  
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

tinter included

LL1465601 7-24

KEEP OUT OF REACH OF CHILDREN

### SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation. Harmful to aquatic life.

### PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

### FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing.

If exposed or concerned get medical attention. When seeking medical advice take this container with you.

Further information can be obtained from  
AUST: POISONS INFORMATION CENTRE 131 126  
or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)  
or call Resene 0800 737 363.

For use as a decorative/protective coating.  
For full technical instructions see Data Sheet D314K.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways. See [resene.com/](http://resene.com/) cleanup for cleaning instructions.


# Resene

## SpaceCote Flat

### Kitchen & Bathroom

interior waterborne enamel

with anti-bacterial silver  
protection and MouldDefender

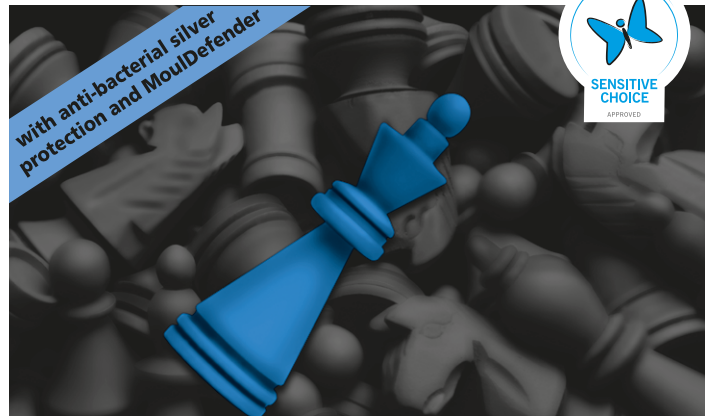

WHITE

Resene SpaceCote Flat Kitchen & Bathroom is a durable low odour finish with scuff, scrub and burnish resistance. It combines the popular features of Resene SpaceCote Flat with added MouldDefender to minimise mould growth and the antibacterial protection of silver to deter bacteria, providing a safer environment for occupants.

### Preparation

- Ensure surface is in sound condition, thoroughly sanded to a smooth finish, dry and free from dirt, dust and loose material.
- Remove oil and grease with Resene Interior Paintwork Cleaner. If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80). Efflorescence on masonry **must be treated**.
- Remove the source of any staining.
- Fill cracks and holes in interior walls before sealing.
- **All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.**
- Prepare plasterboard to an appropriate level of finish. Apply Resene Broadwall Surface Prep & Seal (see Data Sheet D807), Resene Broadwall 3 in 1 (see Data Sheet D810) or Resene Sureseal (see Data Sheet D42 or waterborne see Data Sheet D42a) followed by lining paper in critical lighting areas.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

### Priming

- Seal plasterboard and stoppings with Resene Broadwall Waterborne Wallboard Sealer in dry areas (see Data Sheet D403) or Resene Sureseal in wet areas. Seal fibrous plaster with Resene Sureseal.
- Seal hardboard with Resene Sureseal or Resene Waterborne Sureseal to promote the flow of the topcoats.
- Some 'soft' plasterboard preparatory products and under cured gypsum based stoppings may not be suitable basecoats for painting under stressed conditions. If needed, apply a saturation coat of a fully penetrating primer (such as Resene Sureseal) for reinforcement. Use Resene Sureseal or Resene StainLock (see Data Sheet D408) if the surface is water stained or has yellowed due to prolonged exposure to sunlight.
- Seal all surfaces (except timber) which are highly absorbent, in poor condition, affected by efflorescence, friable, powdery or chalky with Resene Sureseal.
- Repaints – spot prime all bare areas with the same primer shown for new work and proceed as for new work.
- Thoroughly sand old solventborne enamels to a uniform dull finish and wipe off sanding dust with a damp cloth. For best results apply a full coat of Resene Quick Dry (see Data Sheet D45) before applying topcoats.
- New, sound cementitious and fibre cement substrates do not normally require a primer but priming with Resene Concrete Primer (see Data Sheet D405) is recommended to achieve the best long-term performance. Prime smooth/glossy cementitious surfaces, including GRC, with Resene ConcreteSeal 3 in 1 (see Data Sheet D409) to achieve topcoat adhesion.
- Stop all nail holes and cracked timber after priming.
- Resene Quick Dry is the recommended primer over customwood, particle board and timber.
- Check the wallpaper type before painting. Coat a small inconspicuous

area with your chosen Resene topcoat paint and colour. Wait at least two weeks, wipe down with water and a cloth and check for surface tack. If the painted area is tacky, apply Resene Waterborne Vinyl Wallpaper Sealer (see Data Sheet D406a) before applying the topcoats.

### Application

- Apply two coats in the required colour allowing dry time between coats.
- Washability and final toughness will develop over several days as the paint hardens.
- If using above an open shower, use Resene Quick Dry as an undercoat before topcoating in Resene SpaceCote Flat Kitchen & Bathroom.
- Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat the coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

### Bathrooms/ensuites/steamy areas

Steam and condensation can cause surfactants in a new paint film to come to the surface as shiny streaks. This does not harm the paint. To ensure your bathroom/ensuite paint finish keeps looking its best: For the first 5-7 showers wipe steam moisture from walls using a lint free cloth immediately after showering. This will prevent the moisture on your freshly painted walls bringing surfactants to the surface. If any marks appear use Resene Interior Paintwork Cleaner, following the instructions in the Resene Caring for your paint finish brochure.

### Maintenance

(after a minimum of four weeks' drying)  
See the Resene Caring for your paint finish brochure or the Resene website for full cleaning instructions.

### Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or [paintback.com.au](http://paintback.com.au) (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



SpaceCote Flat Kitchen & Bathroom SDS

**Resene**  
the paint the professionals use



SpaceCote Flat Kitchen & Bathroom TDS

In Australia: Resene Paints (Aust) Ltd  
7 Production Ave, PO Box 918, Ashmore City, QLD 4214  
Ph 1800 738 383 Visit [resene.com.au](http://resene.com.au)  
In New Zealand: Resene Paints Ltd  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [resene.co.nz](http://resene.co.nz)

## Quick check

**Use on:** Interior walls, ceilings and trim.

**Gloss level:** Flat

**Coverage:** 11 square metres per litre per coat.  
The spreading rate recommended for this product will achieve hiding in two coats for most colours. Increased spreading rates can be used but additional coats may be needed to achieve required film build and hiding. See the Resene website for more information.

**Dry time (minimum):** Touch dry 45 minutes. at 20°C  
Although serviceable after 48 hours, full print and solvent resistance takes 30 days to develop. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

**Recoat time (minimum):** 2 hours at 20°C.

**Serviceable after:** While the coating is serviceable after 48 hours depending on film thickness, tinter level and drying conditions, it will still be in the curing stage. Avoid contact and wiping until fully cured.

**Primer required:** Yes, dependent on surface.

**Usual number of coats:** Two. Bright colours may require an additional coat.

**Application method:** Brush, speed brush, roller or spray.  
**Thinning:** In hot conditions thin with up to 5% Resene Hot Weather Additive to slow drying.

**Clean up:** Water.

**Colour range:** White and colours off white.

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.  
Read the appropriate Product Data Sheet and Safety Data Sheet before use.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause standard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.