

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.

Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

DANGER

KEEP OUT OF REACH OF CHILDREN

Resene

Steel Fab

fast-dry shop primer

LL4170004 7-24

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes skin irritation. Causes serious eye irritation. Harmful if swallowed. Harmful in contact with skin. May cause an allergic skin reaction. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure. Toxic to aquatic life with long lasting effects. May cause respiratory irritation.

PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Contaminated work clothing should not be allowed out of the workplace. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Call a POISON CENTRE, doctor, physician or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of water. If skin irritation occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

If exposed or concerned get medical advice or attention.

If exposed or concerned call a POISON CENTRE or doctor/physician.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

CONTAINS: Xylene 250-640 g/L, Ethylbenzene 120-260 g/L, 1,2,4-Trimethyl Benzene 120-260 g/L, Methyl Ethyl Ketoxime 1-15 g/L, Toluene 20-70 g/L. For use as a decorative/protective coating.


For full technical instructions see Data Sheet RA32.

SPILLS: Use appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll/spray out as much paint as possible on to newspaper before washing out application equipment with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner. See resene.com/cleanup for cleaning instructions.

IN CASE OF FIRE: Use Dry powder, CO₂ or foam for extinction.

Engineered Coating Systems

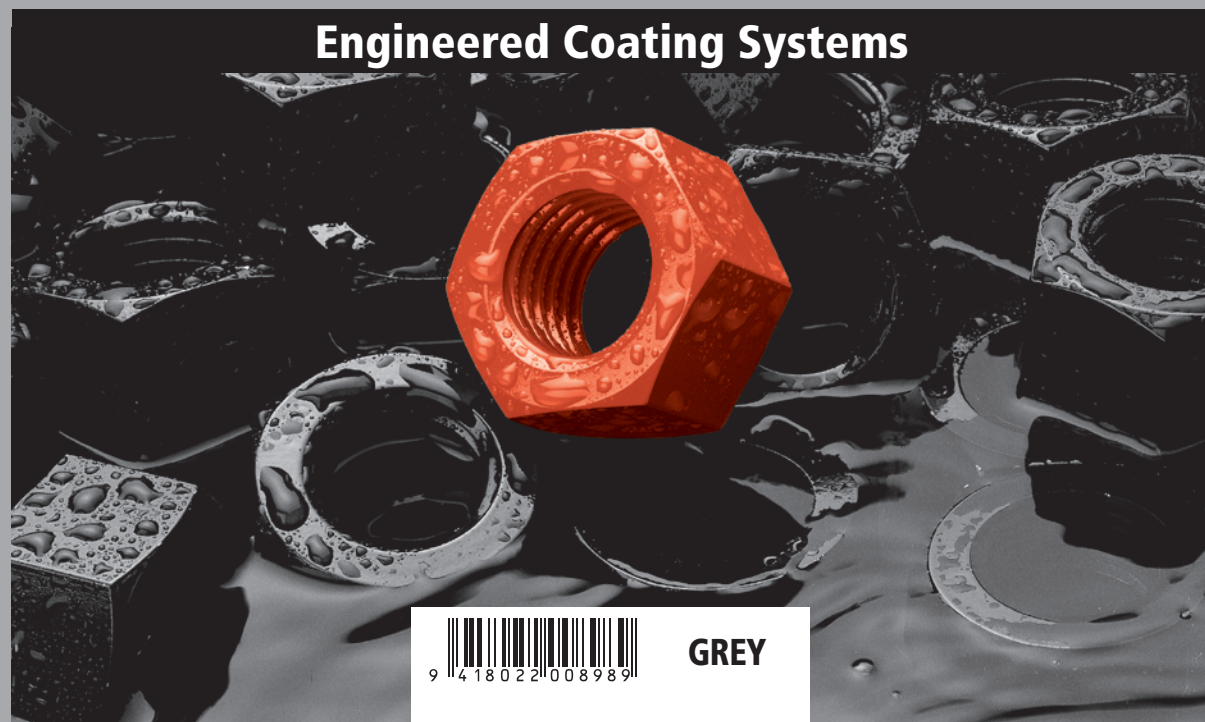

GREY

net
contents
4 litres

Resene Steel Fab Primer is a fast drying, general purpose anti-corrosive primer for use on structural steel.


General

- Thoroughly mix before use. Efficient mixing at all stages requires power mixing with an air or explosion proof mixer until uniformly blended.
- Thinning requirements may vary according to application method, equipment and environmental conditions.
- After thinning thoroughly re-mix using the power mixer.
- Ensure the correct wet film thickness is applied to achieve the required dry film thickness. Allow for any thinner added.
- Using the wrong thinner may have an adverse effect on application and performance.
- Drying is affected by low temperatures and high humidity.
- The temperature of the substrate should be 3°C above the "Dew Point".

- The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.
- Following appropriate preparation, ensure all surfaces are dry and clean prior to painting.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or reseller for your nearest Technical Representative.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

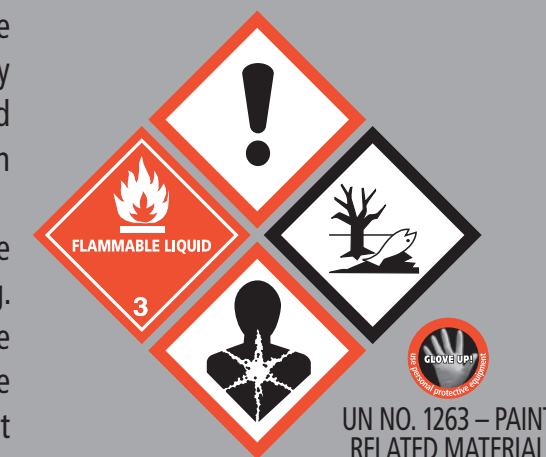

**HIGHLY FLAMMABLE
LIQUID AND VAPOUR**

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.



Steel Fab SDS

Resene

the paint the professionals use



Steel Fab TDS

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Name: Steel Fab.

Generic type: Oil modified polyester.

Colours: Red Oxide, Grey.

Finish: Flat.

Application method: Spray.

Recommended dry film thickness (D.F.T.): 38 microns per coat.

Theoretical coverage: 11 square metres per litre at 38 microns D.F.T.

Dry time (minimum): Tack free: 15-30 minutes at 20°C. Hard dry: 16 hours at 20°C. Drying is affected by low temperatures and high humidity.

Recoat time (minimum): 16 hours at 20°C for alkyd based systems.

Thinning and clean up: Resene Thinner No.5.

Limitations: Not recommended for prolonged exterior exposure without topcoating.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

Read the appropriate Product Data Sheet and Safety Data Sheet before use.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.