

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

WARNING

Read label before use. Keep out of reach of children. Causes mild skin irritation. Causes eye irritation. May damage fertility or the unborn child. Vapours may cause dizziness or drowsiness. Toxic to the aquatic environment with long-lasting effects.

PRECAUTIONS

AVOID BREATHING FUMES/SPRAYS/VAPOURS. USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Do not handle until all safety precautions have been read and understood. Store in original or correctly labeled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Store locked up. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Wear protective gloves and eye/face protection. Wash thoroughly after handling. Clean up spillage. Avoid release to the environment. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint. Do not contaminate any water supply.

FIRST AID

If exposed or concerned: Get medical advice/attention.
 If medical advice is needed, have product container or label at hand.
 IF SWALLOWED: Do NOT induce vomiting. Rinse mouth. Call a POISON CENTRE or doctor/physician if you feel unwell.
 IF ON SKIN (or hair): Remove/take off immediately all contaminated clothing and wash before re-use. Rinse skin with water/shower. If skin irritation or rash occurs: Get medical advice/attention.
 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists: Get medical attention/advice.
 IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

Further information can be obtained from
 AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.
 NZ: NATIONAL POISONS CENTRE 0800 0800 (764 766) or call Resene 0800 737 363.

CONTAINS: Liquid hydrocarbons 210-230 gms/L.
 For use as a decorative/protective coating.
 For full technical instructions see Data Sheet RA31.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

FIRE: In case of fire: Use foam, CO2, dry chemical for extinction.


DANGER

KEEP OUT OF REACH OF CHILDREN

Resene

**Vinyl Etch
adhesion primer**

Engineered Coating Systems

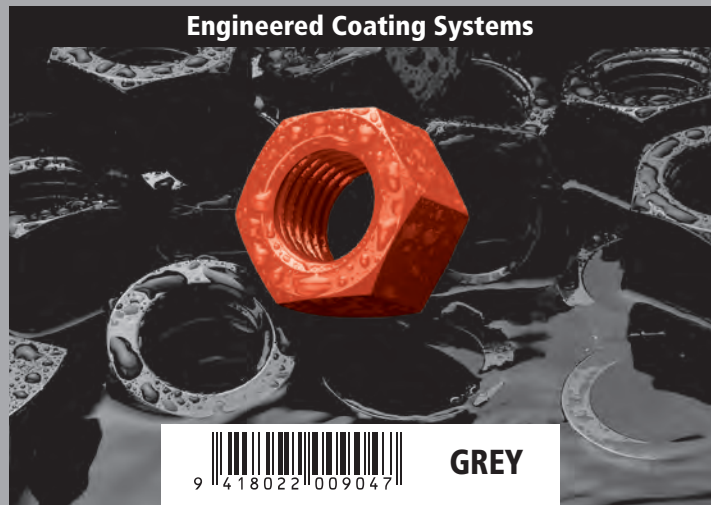

Resene Vinyl Etch Primer combines all the versatility of the normal two pack product with the convenience of a stable single pack. The fast drying time, adhesion, abrasion resistance and overcoatability features have all been maintained in this highly effective chromate free primer/pre-treatment.

General

- Safety Data Sheet (SDS) is available and must be consulted before use.
- In every case it is recommended that the current Resene Data Sheet is consulted for product data, application guidelines and surface preparation information.
- The paint must be thoroughly mixed before use.
- Thinning requirements may vary according to application method, equipment and environmental conditions. Excessive thinning will reduce the dry film build and may result in the appearance of runs or sags in the coating.
- Ensure correct wet film thickness is applied to achieve required dry film thickness. Allowance must be made for any thinner added.
- Use of incorrect thinner may have adverse effect on application and performance.
- Drying is affected by low temperatures and high humidity.
- The temperature of the substrate should be 3°C above the "Dew Point".
- The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.
- Following appropriate preparation, all surfaces must be dry and clean prior to painting.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or Reseller for your nearest Technical Representative.

Maintenance (after a minimum of four weeks' drying)

See the Resene Caring for your paint finish brochure for full cleaning instructions or the Resene website.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.



UN NO. 1263 – PAINT RELATED MATERIAL

FLAMMABLE LIQUID AND VAPOUR
 Keep away from heat/sparks/open flames/
 hot surfaces. No smoking.




Resene
 the paint the professionals use

In Australia: Resene Paints (Aust) Limited
 7 Production Ave, PO Box 924, Beenleigh, QLD 4207
 Phone 1800 738 383 Fax 1800 064 960
 Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
 Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
 Phone (04) 577 0500 Fax (04) 577 0600
 Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SA, an accredited certification body. This product complies with all the requirements of an APAS Paint Specification. Refer to the APAS Specification list on the Resene website for full details. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Name: Resene Vinyl Etch.
Generic type: Vinyl Butyral/Phenolic.
Colours: Grey, Red Oxide and Black.
Finish: Semi-gloss.
Application method: Spray (brush application suitable for small areas or touch up only).
Recommended dry film thickness (D.F.T.): 12-20 microns. (A film thickness of 20 microns is recommended when a period of exterior exposure is envisaged without topcoat application).
Theoretical coverage: 12.5 square metres per litre per coat at 12 microns D.F.T. 7.5 square metres per litre per coat at 20 microns D.F.T.
Dry time (minimum): 15 minutes at 18°C. Drying is affected by low temperatures and high humidity.
Recoat time (minimum): Recoat after 1 hour at 18°C.
Thinning: Resene Thinner No.4.
Clean up: Resene Thinner No.4 or methylated spirits.
Resene Data Sheet: RA31.
Limitations: Not formulated for long term exterior protection without overcoating.
Overcoating: Severe marine environment - one week. Mild marine or better - up to three months.
 Suitable for overcoating with Resene epoxies, vinyls, urethanes, alkyds and acrylics. Not suitable for direct overcoating with Resene Imperite I.F. 500 series topcoats. Drying times of alkyd based paints may be extended when applied directly over Resene Vinyl Etch.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.
In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.