

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre
tint included

LL292301 7-24

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Harmful if swallowed. Causes skin irritation. Causes serious eye irritation. May cause an allergic skin reaction. May cause damage to organs through prolonged or repeated exposure. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Wear protective gloves and clothing, eye and face protection. Wash all exposed external body areas thoroughly after handling. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment.

FIRST AID

SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor, physician or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of water. If skin irritation occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

If exposed or concerned get medical advice or attention. Call a POISON CENTRE, doctor or physician if you feel unwell.

If medical advice is required have product container or label at hand.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Naphtha Petroleum, heavy hydrotreated 90-200 g/L, Benzotriazol derivatives 0-10 g/L.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet D57D.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.


CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways. See resene.com/cleanup for cleaning instructions.

WARNING

KEEP OUT OF REACH OF CHILDREN

Resene Woodsman Decking Oil Stain

hybrid waterborne-alkyd
exterior

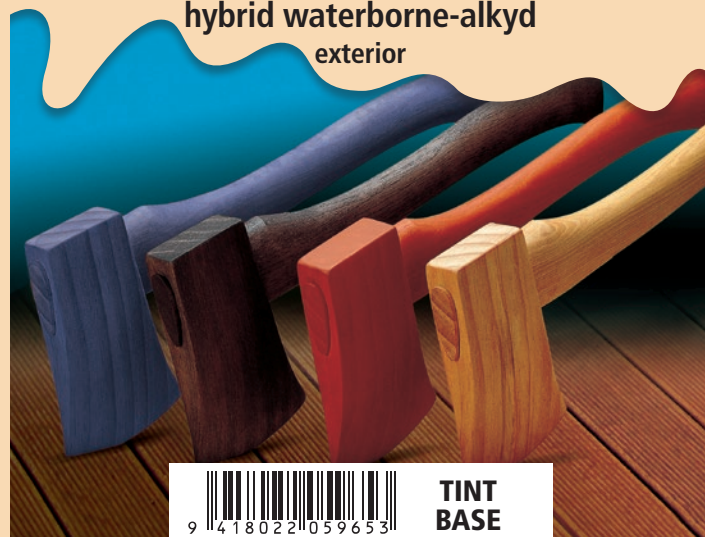

TINT
BASE

Resene Woodsman Decking Oil Stain is a hybrid waterborne-alkyd wood stain ideal for timber decks. It's available in a range of durable colours including Resene CoolColour to help reflect more heat.

Preparation

- Allow new, dressed or dense timber to weather for 2-3 months prior to staining.
- Ensure the surface is in sound condition, dry and free from dirt, dust, loose material, oil (including mineral oil-based wood finishes or similar) and salt. Remove any gross contamination and semi-detached timber fibres by sanding. Alternatively scrub down using Resene Timber and Deck Wash (see Data Sheet D813).
- For a deck that is already wood stained, treat with Resene Timber and Deck Wash to remove dirt, natural stains and enhance the degree of product penetration.
- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).
- For repaints of existing penetrating stains remove any gross contamination and loose cellulose fibres. Complete removal of existing stain is required when the existing stain is film forming or mineral oil-based.
- **All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.**
- Always colour test first to check your choice of Resene Woodsman Decking Oil Stain colour gives the result you want on the actual timber you are staining.
- Consult your Resene ColorShop or reseller for advice on coating severely weathered surfaces, exotic timbers, non-standard timbers and exterior doors and windows.
- This product may be used to stain a wide variety of surfaces. If the surface you propose to stain is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Precautions

- Contains powerful fungicides.
- Avoid skin contact.
- Will not prevent checking of plywood.
- Where alkaline cleaners (including Resene Moss & Mould Killer and Resene Timber and Deck Wash) are used to prepare the substrate, hose off any residue with clean water. These residues can affect film formation and durability.
- Trafficable areas coated with this product will not comply with the Building Act Clause D1.1.3(d).

Application

• Any movement of timber (board dimensional changes) will be exacerbated with darker colours. A CoolColour version will reflect more heat compared to the standard colour. However, this will reduce the

potential for dimensional changes rather than necessarily eliminate it. If in doubt, use a lighter colour option to minimise heat build-up.

- Before use and frequently during use, stir well with a wide flat stirrer to ensure even distribution of colour.
- Do not apply to film forming stains or mineral oil-based wood finishes.
- This product is supplied at near water viscosity. Do not thin.
- Apply using a Resene DeckMaster brush or lambswool Swish Mop applicator. Do not allow the coating to pool in troughs or valleys.
- Aim to achieve the targeted coverage for the substrate (coverage will vary with timber species/density and degree of weathering). Typical application rates: Dressed timber: 1st coat, 12-14 square metres per litre, 2nd coat after 3 months 12-14 square metres per litre. Badly weathered timber: 1st coat, 3-4 square metres per litre, 2nd coat after 3 months 5-7 square metres per litre. These application rates are a guide only. Stain longevity will depend upon exposure levels and colour.
- Do not apply excess product as this can lead to stickiness. When applying a second coat, apply sparingly and spread well to avoid excess product build up.
- Coat all faces of the timber with special attention to end grains.
- This stain will not penetrate through existing coatings or very hard latewood bands.
- Maintenance is usually needed after one to two summers dependent on the amount of direct weathering. Light applications, light colours and dressed surfaces may require maintenance sooner, while heavier applications and darker colours will require less maintenance.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



Woodsman Decking Oil Stain SDS

Resene

the paint the professionals use



Woodsman Decking Oil Stain TDS

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Use on: Timber deck surfaces.

Gloss level: None. Fully penetrating over bare timber.
Typical coverage: Dependent upon timber density/species and degree of weathering. Aim to achieve the targeted coverage for the substrate (coverage will vary with timber species/density and degree of weathering). Typical application rates: Dressed timber: 1st coat, 12-14 square metres per litre, 2nd coat after 3 months 12-14 square metres per litre. Badly weathered timber: 1st coat, 3-4 square metres per litre, 2nd coat after 3 months 5-7 square metres per litre. Do not apply excess product as this can lead to stickiness. When applying a second coat, apply sparingly and spread well to avoid excess product build up.
Dry time (minimum): 30 minutes at 20°C. Suitable for light foot traffic after 24 hours in normal drying conditions. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.
Recoat time (minimum): Dependent upon timber type. 1 hour at 20°C for open timbers such as Pine/Cedar, 24 hours at 20°C for dense timbers such as Kwila/Vitex/Garapa and Purple Heart.

Primer required: No.
Usual number of coats: Two.

Application method: Resene DeckMaster brush or lambswool Swish Mop applicator.

Thinning: Do not thin.
Clean up: Warm soapy water when wet. Mineral turps or Resene Brush Cleaner once the product is beginning to dry and set-up. If dedicated brushware is used it can be left for a period of time without cleaning if it is used for the same stain and colour.

Colour range: Standard colours, refer Resene Exterior Woodcare colour chart.

Also available as Resene Woodsman Decking Oil Stain CoolColour to help reflect heat from exterior surfaces. Application of a Resene CoolColour will reflect more heat than the same colour made using non-cool pigmentation and reduce heat related stress on the substrate; it will not make the stained surface cool to touch. Check with Resene staff whether a Resene CoolColour is right for your project.

Before use: Stir well with a wide flat stirrer and also stir during application.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

Read the appropriate Product Data Sheet and Safety Data Sheet before use.

COMBUSTIBLE LIQUID

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.