


Sports Court Coating

waterborne exterior/interior



KEEP OUT OF REACH OF CHILDREN

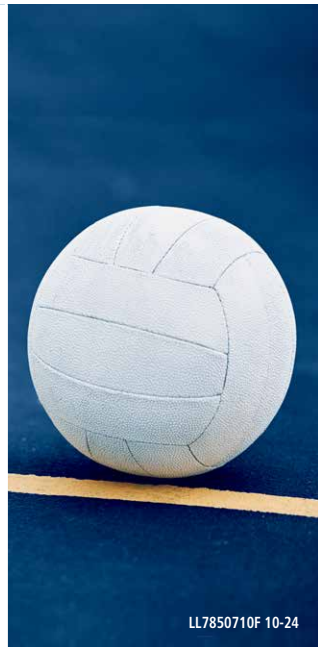

ULTRA DEEP

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

FIRST AID

IF SWALLOWED: all a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.
IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing.

When seeking medical advice take this container with you.

Further information can be obtained from AUST. POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet D303.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways. See resene.com/cleanup for cleaning instructions.

Resene Sports Court Coating is a waterborne coating filled with graded silicas designed for concrete and composite courts to give a durable, tough topping with excellent traction and even bounce properties. Use it for courts for sports such as tennis, basketball, netball, pickleball, indoor cricket and general leisure and play spaces inside and out.

Resene Sports Court Coating is based on a coating that has been classified as a slow pace court finish. If used with a standard tennis ball, a slow pace court will play slower, making it ideal for general use on courts at locations such as tennis clubs, schools and holiday resorts.

Preparation

- Ensure the surface is in sound condition, dry and free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Wash with Resene Paint Prep and Housewash (see Data Sheet D812) to remove accumulated windblown salt, oil and grease.

- Allow new concrete to cure for a minimum of 28 days. Acid etch concrete courts before painting.

- Treat efflorescence on concrete **before coating**.
- Clean new bare bitumen with Resene Heavy Duty Paint Prep and Oil Remover (see Data Sheet D816). Machine scrubbing will enhance removal of dirt and contaminants. Rinse clean with cold tap water and allow to dry thoroughly.

- When recoating a surface previously coated with a product other than Resene Sports Court Coating or Resene Tennis Court Coating, remove all the old coating by captive abrasive blasting or diamond grinding. Once the coating is removed, the clean surface must have a surface profile resembling 180 grit sandpaper. Avoid leaving a surface rich in aggregate.

- When recoating a surface previously successfully coated with Resene Sports Court Coating or Resene Tennis Court Coating, first acid etch any exposed bare concrete, then prime with Resene Sports Court Coating before recoating the cleaned surface or spot prime any exposed bitumen with Resene Membrane Primer (see Data Sheet D49) or exposed bare concrete with Resene Sureseal (see Data Sheet D42) before recoating. Apply Resene Sports Court Coating direct over any sound and clean existing Resene Sports Court Coating or Resene Tennis Court Coating.

- **All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.**

- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Priming

- Weathered concrete - apply one full coat of Resene Sureseal.

- Bitumen - apply one full coat of Resene Membrane Primer.

Application

- Spray using a Graco GMAX 7900 HD unit with a flow rate of no less than 8.3 litres per minute, fitted with a 1/2 inch hose and in line gun fitted with a 45 thou tip.

- For roller application use a Resene No.15 High Solids sleeve.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



Sports Court Coating SDS



Sports Court Coating TDS

Resene

the paint professionals use

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.com.nz

Quick check

Use on: Concrete and bitumen surfaces.

Gloss level: Rough texture.

Typical coverage: Spray: 2 square metres per litre. Rolling: First coat 2-6 square metres per litre, second coat 4-6 square metres per litre. Coverage may vary depending on substrate, colour, application technique and weather/temperature conditions.

Dry time (minimum): 1 hour at 20°C. Allow at least 24 hours before using courts. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period. Drying is slowed by low temperatures and high humidity.

Recoat time (minimum): 3 hours at 20°C. **Primer required:** Dependent upon surface. **Usual number of coats:** Spray - one. Rolling - two.

Application method: Spray. For roller application use a Resene No.15 High Solids sleeve.

Thinning and clean up: Water.

Colour range: Available in white, colours off white and colours off ultra deep tone, including a range of sports court coating colours. It can be tinted to the Resene Non-Skid Deck & Path range.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

Read the appropriate Product Data Sheet and Safety Data Sheet before use.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.

Colour range:



Colours are as close as printing process allows. Always check a physical sample of the colour prior to purchasing to confirm your colour choice. Other colours may be tinted on request.